

TECHNICAL DATA SHEET

DAB12-26EV


Applications like electric vehicles, solar, marine,... are wide and varied with many durability & power demands placed firmly on the batteries' shoulders. Our AGM batteries always deliver when you need it, whatever your deep cycle requirement in extreme situations is. Tough ABS case with INSERT TERMINALS as standard, smaller sizes with FASTON. Special Active Material Formulation & AGM Technology delivers cranking amps, general power and long/deep discharges.

GOOD CYCLE LIFE and resistance to mechanical stress are the elements all in one battery.



| | Dimensions mm - kg | | | | | | Dimensions Inches - lbs | | | | | | Cold Cranking Amps | | |
|------------|--------------------|-------|-------------|---------------|----------------|--------|-------------------------|-------|-------------|---------------|----------------|--------|--------------------|------------|-------------|
| | Length | Width | Height Auto | Height Insert | Height Battery | Weight | Length | Width | Height Auto | Height Insert | Height Battery | Weight | 20°C (68°F) | 0°C (32°F) | -18°C (0°F) |
| DAB12-26EV | 168 | 178 | - | 117 | 124 | 8.4 | 6.59 | 6.99 | - | 4.61 | 4.88 | 18.52 | 316 | 228 | 149 |

| | Volts | Thread size mm | Reserve Capacity - Mins | | | | | Capacity - Ampere Hour* | | | | | | |
|------------|-------|----------------|-------------------------|---------|---------|---------|--------|-------------------------|-------|-------|-------|------|------|------|
| | | | 75 Amps | 25 Amps | 20 Amps | 15 Amps | 8 Amps | 100 Hr | 48 Hr | 20 Hr | 10 Hr | 5 Hr | 3 Hr | 1 Hr |
| DAB12-26EV | 12 | 5 | - | 24 | 42 | 68 | 148 | 33.9 | 31.9 | 29.5 | 25.5 | 22.2 | 20.5 | 16.3 |

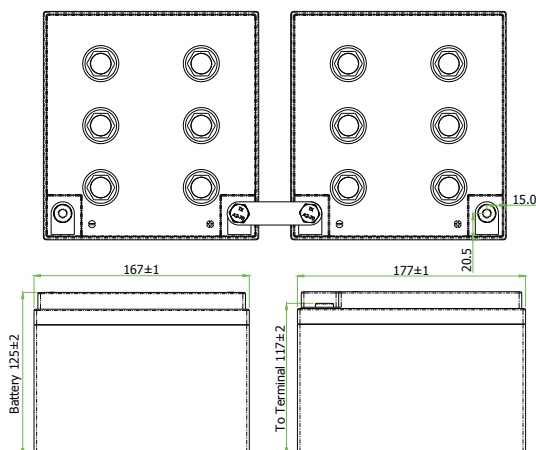

Charging - To obtain maximum cycle life from your battery, it is important that a suitable charging profile is used. For information about our range of chargers and our recommended charging profile, please contact us.

NOTE : All our AGM batteries are true cycling batteries, plate chemistry is specifically for cyclic applications.